
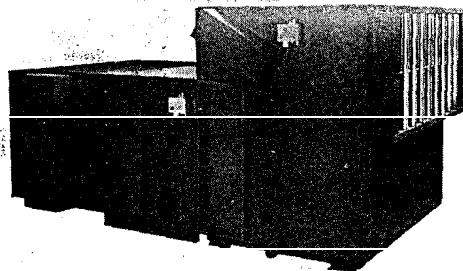


Since The Trane Company has a policy of continuous product improvement, it reserves the right to change specifications and design without notice.

AUGUST, 1974
SUPERSEDES CLCH-1M-1
DATED MARCH, 1970

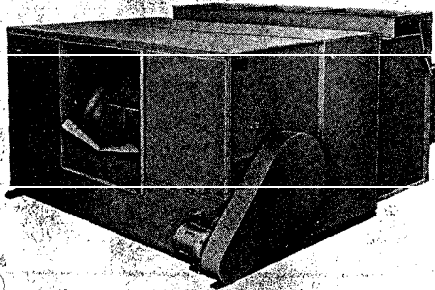

CENTRAL STATION CLIMATE CHANGERS

LOW, MEDIUM AND HIGH PRESSURE
DRAW-THRU, BLOW-THRU AND
SPRAYED COIL UNITS INCLUDING
PREHEAT AND HOT DECK
ELECTRIC COILS

SHIPPING

Central Station Climate Changers are shipped either assembled or in sections, depending upon unit size and configuration. All units or sections of units are attached securely to skids. Nuts, bolts and washers for assembling the units are attached to one of the skids. Motors are shipped separately when their size or location on the unit prevents safe transit in shipping.

Electric preheat coil assemblies and remote control panels are shipped

on a skid. Protective panels cover openings on the duct assemblies. If the remote panel includes an inter-connecting wire harness (optional equipment), it is attached to the panel, coiled and secured with steel straps to the package. Mounting legs for the remote panel, when ordered, are included with the panel package.

Electric hot deck coils are shipped mounted in the blow-thru unit. Remote control panels with or without wiring harness and panel mounting legs are shipped as described below.

TABLE OF CONTENTS

	Page
SHIPPING	1
RECEIVING AND HANDLING	3
UNIT LOCATION RECOMMENDATIONS	3
DRAW-THRU UNITS - LOW AND MEDIUM PRESSURE	6
ACCESSORIES - DRAW-THRU UNITS	10
BLOW-THRU UNITS - LOW AND MEDIUM PRESSURE	12
ACCESSORIES - BLOW-THRU UNITS	13
SPRAYED COIL UNITS - LOW AND MEDIUM PRESSURE	13
HIGH PRESSURE UNITS	13
PREHEAT AND HOT DECK COILS	13
REMOTE CONTROL PANELS	13